

# A-5916100

CHANGEOVER SWITCH WITHOUT 0 2P 4 POS.63A.D2

|             |               |
|-------------|---------------|
| <b>Code</b> | 009A-5916100  |
| <b>EAN</b>  | 8430892103862 |

## Product description

Changeover step switch, IP20 with 1-2-3-4 grey front plate 64x64 for panel fixing. 2 poles 63A. Size D2. Ergonomic screwless quick-mount handle. Connection with cage terminals for 16-50 mm<sup>2</sup> cable. Compatible with multiple accessories from the A5 series.

## Logistic data

|                     |          |
|---------------------|----------|
| Customs code        | 85365080 |
| ETIM code           | EC002611 |
| Package units       | 1        |
| Package height (mm) | 163      |
| Package width (mm)  | 88       |
| Package length (mm) | 86       |

## Technical data


|                         |                         |
|-------------------------|-------------------------|
| Poles                   | 2                       |
| Operational rating (Ie) | 63 A                    |
| Thermal rating (Ith)    | 70 A                    |
| Wire section (AWG)      | 16 - 1                  |
| Wire section flexible   | 16 - 50 mm <sup>2</sup> |
| Tightening torque       | 3,5 Nm                  |
| Connection screws       | M8                      |

### Terminal



|                                        |                                                                                                                                                                     |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Max. fuse protection (gG/aM)           | 63/63 A (415 V)<br>63/63 A (500 V)                                                                                                                                  |
| Conditional shortcircuit current (Icc) | 8 kA (415 V)<br>8 kA (500 V)                                                                                                                                        |
| Insulating voltage (V~)                | 690                                                                                                                                                                 |
| Insulating voltage (V...)              | 600                                                                                                                                                                 |
| Dummy AC-21A                           | 22 kW (3x230 V)<br>45 kW (3x415 V)<br>45 kW (3x500 V)                                                                                                               |
| Mixed load AC-22A                      | 18,5 kW (3x230 V)<br>37 kW (3x415 V)<br>45 kW (3x500 V)                                                                                                             |
| Motor load AC-23A                      | 18,5 kW (3x230 V)<br>30 kW (3x415 V)<br>37 kW (3x500 V)                                                                                                             |
| UL Electric characteristics            | 5 hp 1-fase (110-120 V)<br>10 hp 1-fase (220-240 V)<br>15 hp 3-fase (220-240 V)<br>25 hp 3-fase (380-415 V)<br>30 hp 3-fase (440-480 V)<br>32 hp 3-fase (550-600 V) |
| Standard                               | IEC 60947-3<br>UL 508                                                                                                                                               |
| Handle type                            | Directo                                                                                                                                                             |

Connection

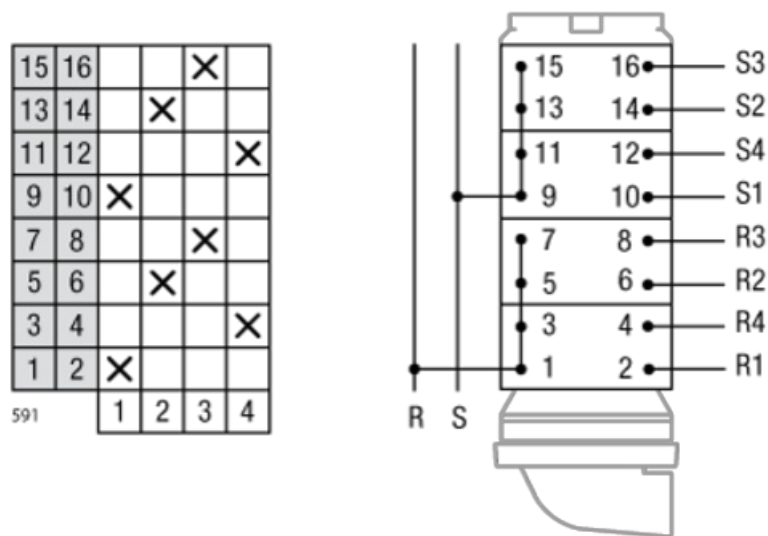

Dimensions

