

## A-7460000

VOLTMETER SWITCH 3P Y 3P-N 12A.D0



|                            |                                                                                                                                                                                                                                                                                                                                    |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Code</b>                | 009A-7460000                                                                                                                                                                                                                                                                                                                       |
| <b>EAN</b>                 | 8430892106597                                                                                                                                                                                                                                                                                                                      |
| <b>Product description</b> | Voltmeter selector switch (3 phases+3 phases & neutral), IP20 with TR-ST-RS-0-R0-S0-T0 grey front plate 48x48 for panel fixing. 3 poles y 3+N poles 12A. Size D0. Ergonomic screwless quick-mount handle. Connection with cage terminals for 2.5-6 mm <sup>2</sup> cable. Compatible with multiple accessories from the A5 series. |


Logistic data

|                           |          |
|---------------------------|----------|
| Customs code              | 85365080 |
| ETIM code                 | EC000911 |
| Package units             | 1        |
| Product gross weight (kg) | 0.175    |
| Package height (mm)       | 82       |
| Package width (mm)        | 50       |
| Package length (mm)       | 50       |

## Technical data

|                                        |                                                                                                                                                                  |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Poles                                  | NA/NA                                                                                                                                                            |
| Operational rating (Ie)                | 12A                                                                                                                                                              |
| Thermal rating (Ith)                   | 16 A                                                                                                                                                             |
| Wire section (AWG)                     | 10                                                                                                                                                               |
| Wire section rigid                     | 2,5 - 6 mm <sup>2</sup>                                                                                                                                          |
| Wire section flexible                  | 2,5 - 6 mm <sup>2</sup>                                                                                                                                          |
| Tightening torque                      | 1,6 Nm                                                                                                                                                           |
| Connection screws                      | M4                                                                                                                                                               |
| Terminal                               |                                                                               |
| Max. fuse protection (gG/aM)           | 25/25 A (415 V)<br>25/25 A (500 V)                                                                                                                               |
| Conditional shortcircuit current (Icc) | 6 kA (415 V)<br>6 kA (500 V)                                                                                                                                     |
| Insulating voltage (V~)                | 690                                                                                                                                                              |
| Insulating voltage (V...)              | 400                                                                                                                                                              |
| Dummy AC-21A                           | 3 kW (3x230 V)<br>7,5 kW (3x415 V)<br>11 kW (3x500 V)                                                                                                            |
| Mixed load AC-22A                      | 2,2 kW (3x230 V)<br>5,5 kW (3x415 V)<br>7,5 kW (3x500 V)                                                                                                         |
| Motor load AC-23A                      | 2,2 kW (3x230 V)<br>4 kW (3x415 V)<br>5,5 kW (3x500 V)                                                                                                           |
| UL Electric characteristics            | 1 hp 1-fase (110-120 V)<br>1,5 hp 1-fase (220-240 V)<br>1 hp 3-fase (220-240 V)<br>2 hp 3-fase (380-415 V)<br>3 hp 3-fase (440-480 V)<br>3 hp 3-fase (550-600 V) |
| Standard                               | IEC 60947-3<br>UL 508                                                                                                                                            |
| Handle type                            | Directo                                                                                                                                                          |

Connection

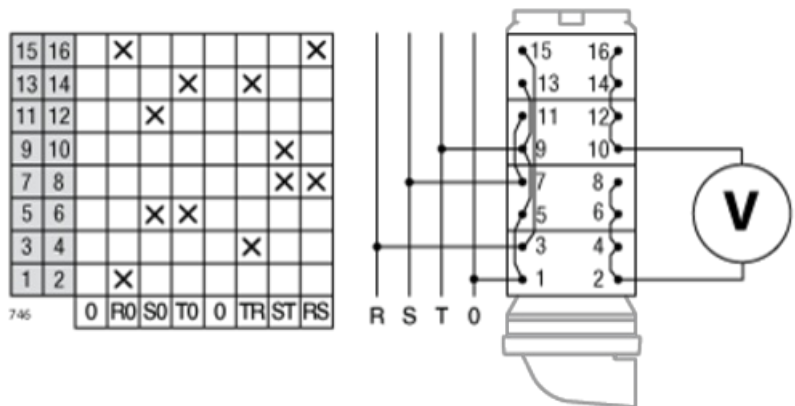

Dimensions

