

# A-7942000

STAR-STOP MANIPULATOR 25A.D0

|             |               |
|-------------|---------------|
| <b>Code</b> | 009A-7942000  |
| <b>EAN</b>  | 8430892107075 |

## Product description

Start-Stop selector switch, IP20 with Start-Stop grey front plate 48x48 for panel fixing, 25A. Size D0. Ergonomic screwless quick-mount handle. Connection with cage terminals for 2.5-6 mm<sup>2</sup> cable. Compatible with multiple accessories from the A5 series.

## Logistic data

|               |          |
|---------------|----------|
| Customs code  | 85365080 |
| ETIM code     | EC002611 |
| Package units | 1        |

## Technical data

|                         |                         |
|-------------------------|-------------------------|
| Poles                   | 2                       |
| Operational rating (Ie) | 25 A                    |
| Thermal rating (Ith)    | 25 A                    |
| Wire section (AWG)      | 10                      |
| Wire section rigid      | 2,5 - 6 mm <sup>2</sup> |
| Wire section flexible   | 2,5 - 6 mm <sup>2</sup> |
| Tightening torque       | 1,6 Nm                  |
| Connection screws       | M4                      |

### Terminal



|                              |                 |
|------------------------------|-----------------|
| Max. fuse protection (gG/aM) | 25/25 A (415 V) |
|                              | 25/25 A (500 V) |

|                                        |              |
|----------------------------------------|--------------|
| Conditional shortcircuit current (Icc) | 6 kA (415 V) |
|                                        | 6 kA (500 V) |

|                           |     |
|---------------------------|-----|
| Insulating voltage (V~)   | 690 |
| Insulating voltage (V...) | 400 |

|              |                   |
|--------------|-------------------|
| Dummy AC-21A | 7,5 kW (3x230 V)  |
|              | 15 kW (3x415 V)   |
|              | 18,5 kW (3x500 V) |

|                   |                   |
|-------------------|-------------------|
| Mixed load AC-22A | 7,5 kW (3x230 V)  |
|                   | 15 kW (3x415 V)   |
|                   | 18,5 kW (3x500 V) |


|                   |                  |
|-------------------|------------------|
| Motor load AC-23A | 5,5 kW (3x230 V) |
|                   | 7,5 kW (3x415 V) |
|                   | 11 kW (3x500 V)  |

|                             |                         |
|-----------------------------|-------------------------|
| UL Electric characteristics | 2 hp 1-fase (110-120 V) |
|                             | 3 hp 1-fase (220-240 V) |
|                             | 2 hp 3-fase (220-240 V) |
|                             | 3 hp 3-fase (380-415 V) |
|                             | 5 hp 3-fase (440-480 V) |
|                             | 7 hp 3-fase (550-600 V) |

|          |             |
|----------|-------------|
| Standard | IEC 60947-3 |
|          | UL 508      |

|             |         |
|-------------|---------|
| Handle type | Directo |
|-------------|---------|

Connection

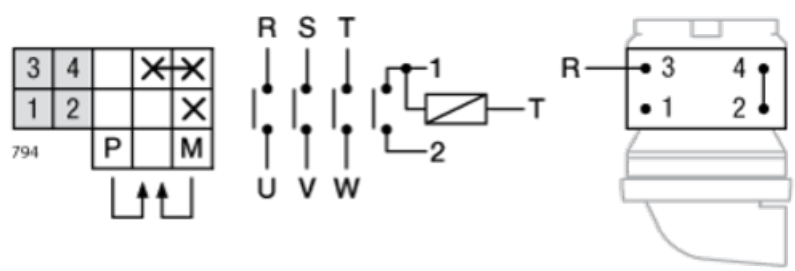

Dimensions

