

AB5526100

ON-OFF SWITCH DISCONNECTOR 3P.63A.D2 PADLOCKABLE RED/YELLOW



Code	009AB5526100
EAN	8430892125307
Product description	Padlockable on-off switch disconnecter, IP20 with red handle/yellow front plate 64x64 for panel fixing. 3 poles 63A. Size D2. Ergonomic screwless quick-mount handle. Connection with cage terminals for 16-50 mm ² cable. Compatible with multiple accessories from the A5 series.

Logistic data

Customs code	85365080
ETIM code	EC000216
Package units	1
Product gross weight (kg)	0.455
Package height (mm)	107
Package width (mm)	82
Package length (mm)	82

Technical data

Poles	3
Operational rating (Ie)	63 A
Thermal rating (Ith)	70 A
Wire section (AWG)	16 - 1
Wire section flexible	16 - 50 mm ²
Tightening torque	3,5 Nm
Connection screws	M8


Terminal



Max. fuse protection (gG/aM)	63/63 A (415 V)
	63/63 A (500 V)
Conditional shortcircuit current (Icc)	8 kA (415 V)
	8 kA (500 V)
Insulating voltage (V~)	690
Insulating voltage (V...)	600
Dummy AC-21A	22 kW (3x230 V)
	45 kW (3x415 V)
	45 kW (3x500 V)
Mixed load AC-22A	18,5 kW (3x230 V)
	37 kW (3x415 V)
	45 kW (3x500 V)
Motor load AC-23A	18,5 kW (3x230 V)
	30 kW (3x415 V)
	37 kW (3x500 V)
UL Electric characteristics	5 hp 1-fase (110-120 V)
	10 hp 1-fase (220-240 V)
	15 hp 3-fase (220-240 V)
	25 hp 3-fase (380-415 V)
	30 hp 3-fase (440-480 V)
	32 hp 3-fase (550-600 V)
Standard	IEC 60947-3
	UL 508
Handle type	Bloqueable candados

Connection

5	6		×
3	4		×
1	2		×
552	0	1	

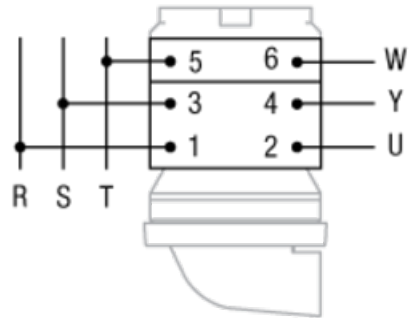

Dimensions

