

# AC553B100

ON-OFF SWITCH DISCONNECTOR 4P.200A.D3 PADLOCKABLE BLACK/GREY

|      |               |
|------|---------------|
| Code | 009AC553B100  |
| EAN  | 8430892171618 |

**Product description**

Padlockable on-off switch disconnecter,IP20 with black handle/grey front plate 64x64 for panel fixing. 4 poles 200A. Size D3. Ergonomic screwless quick-mount handle. Cable lug terminal connection for 95 mm<sup>2</sup> cable. Compatible with multiple accessories from the A5 series.

Logistic data

|               |          |
|---------------|----------|
| Customs code  | 85365080 |
| ETIM code     | EC000216 |
| Package units | 1        |

Technical data

|                         |                    |
|-------------------------|--------------------|
| Poles                   | 4                  |
| Operational rating (Ie) | 200 A              |
| Thermal rating (Ith)    | 200 A              |
| Wire section flexible   | 95 mm <sup>2</sup> |
| Connection screws       | M8                 |

Terminal



|                              |               |
|------------------------------|---------------|
| Max. fuse protection (gG/aM) | 200 A (415 V) |
|                              | 200 A (500 V) |

|                                        |              |
|----------------------------------------|--------------|
| Conditional shortcircuit current (Icc) | 8 kA (415 V) |
|                                        | 8 kA (500 V) |

|                           |     |
|---------------------------|-----|
| Insulating voltage (V~)   | 690 |
| Insulating voltage (V...) | 600 |


|              |                  |
|--------------|------------------|
| Dummy AC-21A | 55 kW (3x230 V)  |
|              | 110 kW (3x415 V) |
|              | 132 kW (3x500 V) |

|                   |                   |
|-------------------|-------------------|
| Mixed load AC-22A | 55 kW (3x230 V)   |
|                   | 110 kW (3x415 V)  |
|                   | 110 kW (3x 500 V) |

|                   |                 |
|-------------------|-----------------|
| Motor load AC-23A | 55 kW (3x230 V) |
|                   | 90 kW (3x415 V) |

|             |                     |
|-------------|---------------------|
| Standard    | IEC 60947-3         |
| Handle type | Bloqueable candados |

Connection

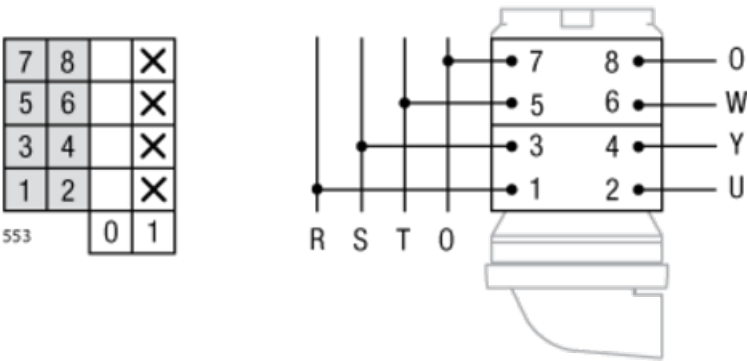

## Dimensions

