

## AI5621000

CHANGEOVER SWITCH 3P 16A.D0 BLACK SCREW HANDLE



|                            |                                                                                                                                                                                                                                                     |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Code</b>                | 009AI5621000                                                                                                                                                                                                                                        |
| <b>EAN</b>                 | 8430892142755                                                                                                                                                                                                                                       |
| <b>Product description</b> | Changeover switch with black screw handle, IP20 with 1-0-2 black front plate 48x48 for panel fixing. 3 poles 16A. Size D0. Connection with cage terminals for 2.5-6 mm <sup>2</sup> cable. Compatible with multiple accessories from the A5 series. |


**Logistic data**

|                     |          |
|---------------------|----------|
| Customs code        | 85365080 |
| ETIM code           | EC000216 |
| Package units       | 1        |
| Package height (mm) | 82       |
| Package width (mm)  | 50       |
| Package length (mm) | 50       |

## Technical data

|                                        |                                                                                                                                                                  |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Poles                                  | 3                                                                                                                                                                |
| Operational rating (Ie)                | 16 A                                                                                                                                                             |
| Thermal rating (Ith)                   | 20 A                                                                                                                                                             |
| Wire section (AWG)                     | 10                                                                                                                                                               |
| Wire section rigid                     | 2,5 - 6 mm <sup>2</sup>                                                                                                                                          |
| Wire section flexible                  | 2,5 - 6 mm <sup>2</sup>                                                                                                                                          |
| Tightening torque                      | 1,6 Nm                                                                                                                                                           |
| Connection screws                      | M4                                                                                                                                                               |
| Terminal                               |                                                                               |
| Max. fuse protection (gG/aM)           | 25/25 A (415 V)<br>25/25 A (500 V)                                                                                                                               |
| Conditional shortcircuit current (Icc) | 6 kA (415 V)<br>6 kA (500 V)                                                                                                                                     |
| Insulating voltage (V~)                | 690                                                                                                                                                              |
| Insulating voltage (V...)              | 400                                                                                                                                                              |
| Dummy AC-21A                           | 5,5 kW (3x230 V)<br>11 kW (3x415 V)<br>15 kW (3x500 V)                                                                                                           |
| Mixed load AC-22A                      | 4 kW (3x230 V)<br>7,5 kW (3x415 V)<br>11 kW (3x500 V)                                                                                                            |
| Motor load AC-23A                      | 3 kW (3x230 V)<br>5,5 kW (3x415 V)<br>7,5 kW (3x500 V)                                                                                                           |
| UL Electric characteristics            | 1,5 hp 1-fase (110-120 V)<br>2 hp 1-fase (220-240 V)<br>2 hp 3-fase (220-240 V)<br>2 hp 3-fase (380-415 V)<br>3 hp 3-fase (440-480 V)<br>5 hp 3-fase (550-600 V) |
| Standard                               | IEC 60947-3<br>UL 508                                                                                                                                            |
| Handle type                            | Directo                                                                                                                                                          |

## Connection

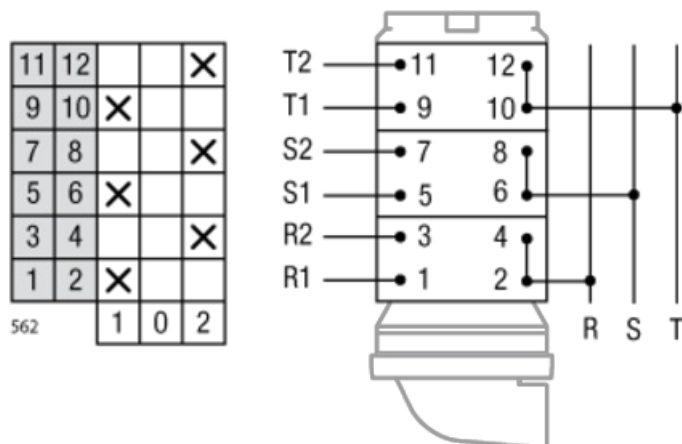

## Dimensions

