

# YL562B301

MOTORISED CHANGEOVER SWITCH 1-0-2 3P 200A INCOMING ON TOP. 80-230VAC



**Code** 007YL562B301

**EAN** 8430892216647

#### **Product description**


Motorised changeover switch 1-0-2, 3 poles 200A with motor unit supply 80-230Vac . The supply incoming cables are connected on the top side of the unit and the load outgoing cables are connected on the bottom side. Size D3 dimensions 185x228x113, includes auxiliary contact 12A. Back plate mounting. Built-in internal links, mechanical and electrical interlock. Local emergency operation, includes removable padlockable handle. Display for switch position indication and operation counter. Impulse control logic. Protection against supply voltage failure . Terminal connection with tubular cable lugs M8 up to 120mm2.

30/04/2025 www.gave.com 1/3

# Logistic data

Technical data  Poles Rated voltage / frequency 690 Operational rating (le) Thermal rating (lth) Wire cross section Tightening torque Connection screws  Terminal  Peak consumption Nominal consumption Weight	
Technical data  Poles Rated voltage / frequency 690 Operational rating (le) Thermal rating (lth) Wire cross section Tightening torque Connection screws  Terminal  Peak consumption Nominal consumption Weight	85365080
Poles Rated voltage / frequency 690 Operational rating (le) Thermal rating (lth) Wire cross section Tightening torque Connection screws  Terminal  Peak consumption Nominal consumption Weight	EC000216
Rated voltage / frequency 690 Operational rating (le) Thermal rating (lth) Wire cross section Tightening torque Connection screws  Terminal  Peak consumption Nominal consumption Weight	
Operational rating (le) Thermal rating (lth) Wire cross section Tightening torque Connection screws  Terminal  Peak consumption Nominal consumption Weight	3
Thermal rating (lth) Wire cross section Tightening torque Connection screws Terminal Peak consumption Nominal consumption Weight	0 V / 50 Hz
Wire cross section  Tightening torque  Connection screws  Terminal  Peak consumption  Nominal consumption  Weight	200 A
Tightening torque  Connection screws  Terminal  Peak consumption  Nominal consumption  Weight	200 A
Terminal  Peak consumption  Nominal consumption  Weight	95 mm <sup>2</sup>
Terminal  Peak consumption  Nominal consumption  Weight	6 Nm
Peak consumption  Nominal consumption  Weight	M8
Nominal consumption Weight	
Weight	2,5 A
	40 mA
Supply voltage (V DC)	2850 gr
	12 V +15%
Standard IE	C 60947-3
Y5 Type	56
Supply 8	0-230V AC

## Connection

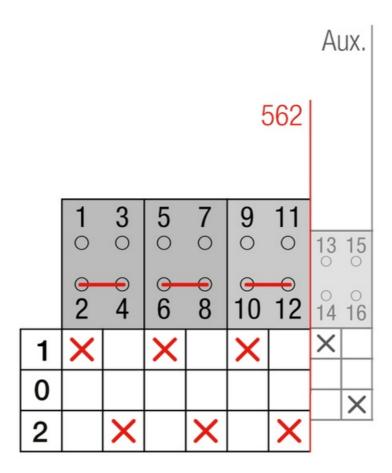

## **Dimensions**

