


## YL563C101

MOTORISED CHANGEOVER SWITCH 1-0-2 4P 250A INCOMING ON TOP. 12V DC



|             |               |
|-------------|---------------|
| <b>Code</b> | 007YL563C101  |
| <b>EAN</b>  | 8430892216715 |

### Product description

Motorised changeover switch 1-0-2 , 4 poles 250A with motor unit supply 12Vdc . The supply incoming cables are connected on the top side of the unit and the load outgoing cables are connected on the bottom side. Size D3 dimensions 185x261x113, includes auxiliary contact 12A. Back plate mounting. Built-in internal links, mechanical and electrical interlock. Local emergency operation, includes removable padlockable handle. Display for switch position indication and operation counter. Impulse control logic. Protection against supply voltage failure . Terminal connection with tubular cable lugs M8 up to 120mm<sup>2</sup>.

Logistic data

|              |          |
|--------------|----------|
| Customs code | 85365080 |
| ETIM code    | EC000216 |

Technical data


|                           |               |
|---------------------------|---------------|
| Poles                     | 4             |
| Rated voltage / frequency | 690 V / 50 Hz |
| Operational rating (Ie)   | 250 A         |
| Thermal rating (Ith)      | 250 A         |
| Wire cross section        | 120 mm²       |
| Tightening torque         | 6 Nm          |
| Connection screws         | M8            |

Terminal



|                       |             |
|-----------------------|-------------|
| Peak consumption      | 2,5 A       |
| Nominal consumption   | 40 mA       |
| Weight                | 2850 gr     |
| Supply voltage (V DC) | 12 V +15%   |
| Standard              | IEC 60947-3 |
| Y5 Type               | 56          |
| Supply                | 12V DC      |

Connection

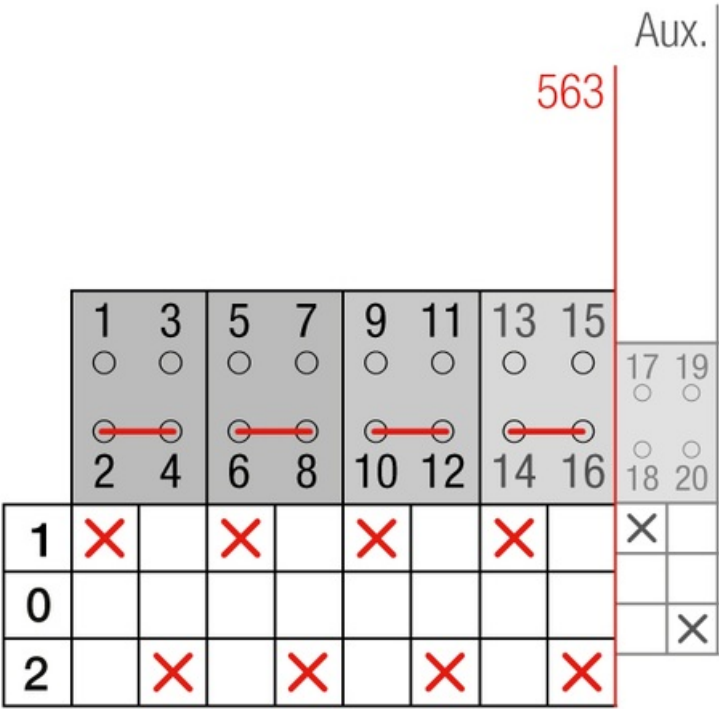

## Dimensions

