

## 67030032

NH FUSE WITH INDICATOR 32A.AM S0



|             |               |
|-------------|---------------|
| <b>Code</b> | 01867030032   |
| <b>EAN</b>  | 8430892109833 |

### Product description

NH0 knife fuse NH0 Rated current 32A with class AM protection curve. Suitable for the protection of engines, transformers and equipment with high boot tips. For tensions up to 690V offers protection against overload and short circuit with a 120KA Rupture capacity up to 500V and 80KA for 690V. Ceramic highly resistant to thermal shocks and pressure. Copper contacts with silver bath and specially for easy introduction into the fuse base. Central melting indicator For quick visualization of the fuse status, spikelet explorer of the stainless steel indicator reverses more reliability when avoiding corrosion and aging problems.


## Fuse data

|                      |               |
|----------------------|---------------|
| Fuse type            | NH            |
| Operating voltage    | 690 V         |
| Utilisation category | aM            |
| Breaking capacity    | 120 kA        |
| Fuse indicator       | Si / Yes      |
| Standards            | IEC 60269-1/2 |

## Technical data

|          |             |
|----------|-------------|
| Standard | IEC 60269-2 |
|----------|-------------|

## Características Fusible

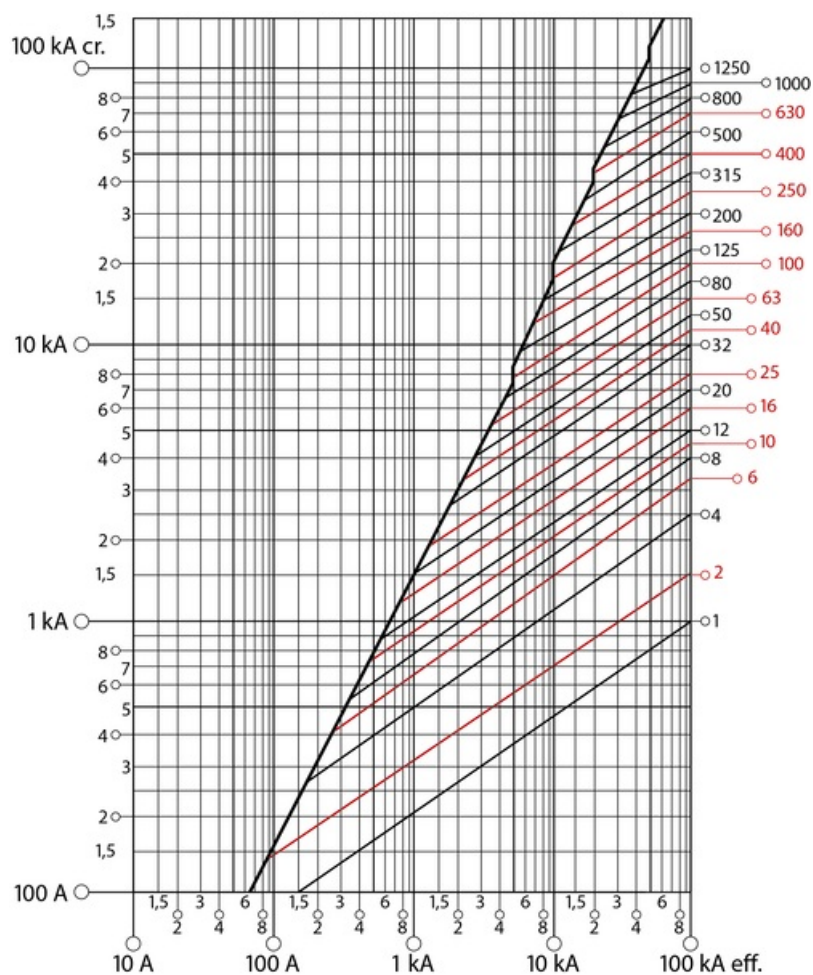

## Dimensions

---

