

PST4A50

SURGE PROTECTOR 3P + N TYPE I + II IMAX.50KA



Code

002PST4A50

EAN

8430892269377


Combiner box technical data

Surge protector type	I+II
Max. continuous operating voltage (Ucpv)	255 Vac
Maximum impulse current (Iimp)	12.5 kA
Nominal discharge current (In)	20 kA
Maximum discharge current (Imax)	50 kA
Protection level at In (Up)	1.5 kV
Standards	IEC 61643-11

Technical data

Standard	IEC 61643-11
----------	--------------

Connection

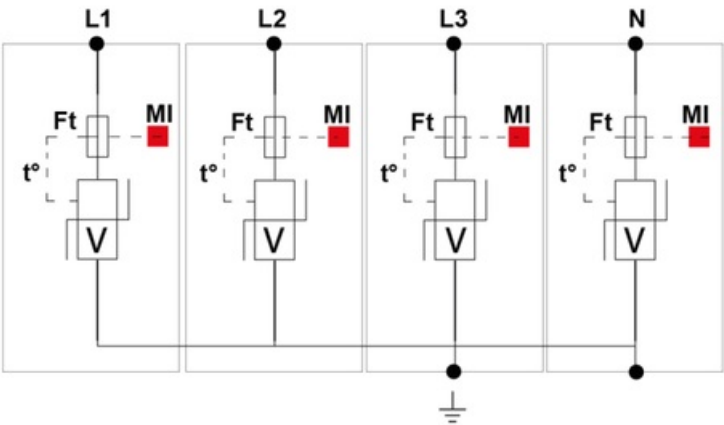

V : Varistor de alta energía
Ft : Fusible térmico
t° : Sistema de desconexión térmica
MI : Indicador de desconexión C : Contacto de teleseñalización

Dimensions

