

TA111M

TA111 MINI 220-240V 50/60HZ




Code	014TA111M
EAN	8430892311212
Product description	Analogue daily cycle time switch with ON/OFF programming, one module wide, 220-240V AC 50/60Hz power supply, one NO contact, switching capacity 15A (resistive load) and 4A (inductive load cosϕ 0.6), minimum switching time 15 minutes, flap programming, switch for manual control with two positions: automatic and permanent ON, no power reserve, DIN rail mounting, cage terminal connection up to 4mm², power consumption 1 VA, IP20 protection.

Time switches

Supply	220-240 V
Nominal frequency	50-60Hz
Power consumption	1 VA
Channel	1
Operating temperature	-10°C +50°C
Degree of protection	IP20
Minimum switching time	15 min
Max. wire cross section	4 mm ²
Net weight (gr)	70
Breaking capacity	Resistive load 15 A Load incandescent bulb 1000 W Inductive load Cos =0,6 4A
Type of contact	NO
Power reserve	Without reserve
Connection	screw terminal
Cycle	24 hours

Connection

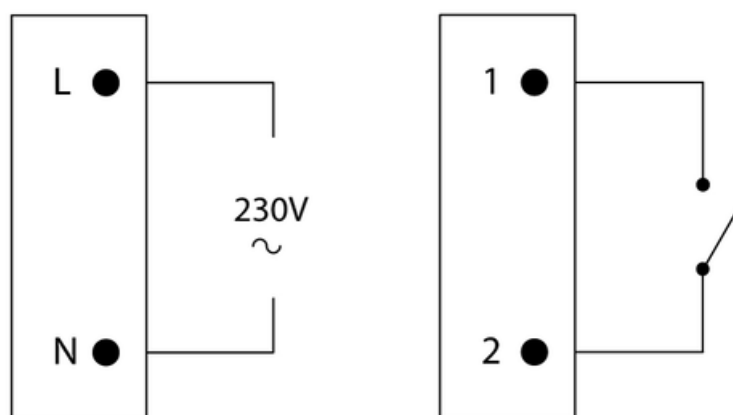

Dimensions

