

TA211M

TA211 MINI 220-240 V AC 50/60Hz




Code	014TA211M
EAN	8430892312103
Product description	Analogue daily cycle time switch with ON/OFF programming, one module wide, 220-240V AC 50/60Hz power supply, one NO contact, switching capacity 15A (resistive load) and 4A (inductive load cosϕ 0.6), minimum switching time 15 minutes, flap programming, switch for manual control with two positions: automatic and permanent ON, 100 hours of power reserve, DIN rail mounting, cage terminal connection up to 4mm², power consumption 1 VA, IP20 protection.

Time switches

Supply	220-240 V
Nominal frequency	50-60Hz
Power consumption	1 VA
Channel	1
Operating temperature	-10°C +50°C
Degree of protection	IP20
Minimum switching time	15 min
Max. wire cross section	4 mm ²
Net weight (gr)	70
Breaking capacity	Resistive load 15 A Load incandescent bulb 1000 W Inductive load Cos =0,6 4A
Type of contact	NO
Power reserve	100 h
Connection	screw terminal
Cycle	24 hours

Connection

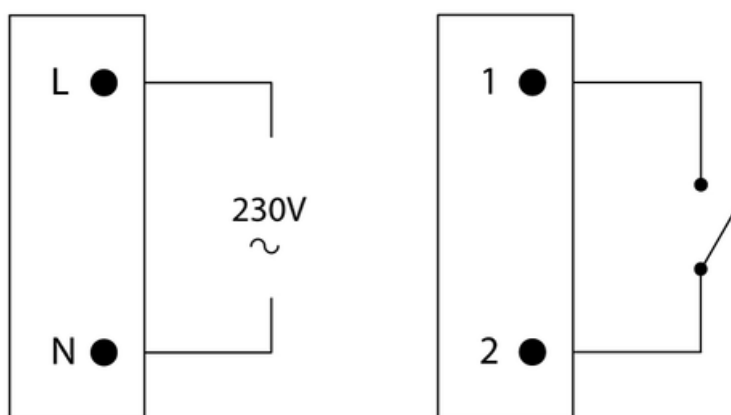

Dimensions

