

ACVM40RS

EV CHARGING POINT MODULAR BOX 1P+N 40A RU+POP+SPD+SCHUKO



Code

030ACVM40RS


EAN

8430892352758

Combiner box technical data

MCB - Circuit breaker	40 A
Curve	C
Breaking capacity EN 60898-1	6 kA
RCCB type	A
Combiner type	AC
Inverter AC output	1P+N
Voltage	230 V AC
Surge protector	Class II
Diferential type	30mA
Incoming current rating	40 A
Surge protector code	PSTC40
Surge protector type	II
Nominal discharge current (In)	20 kA
Maximum discharge current (Imax)	15 kA
Protection level at In (Up)	1.5 kV
Ingress protection IP	IP65 - IEC 60529
Impact protection IK	IK08 - IEC 62262
Standards	IEC EN 6143-1/2

Diagrams

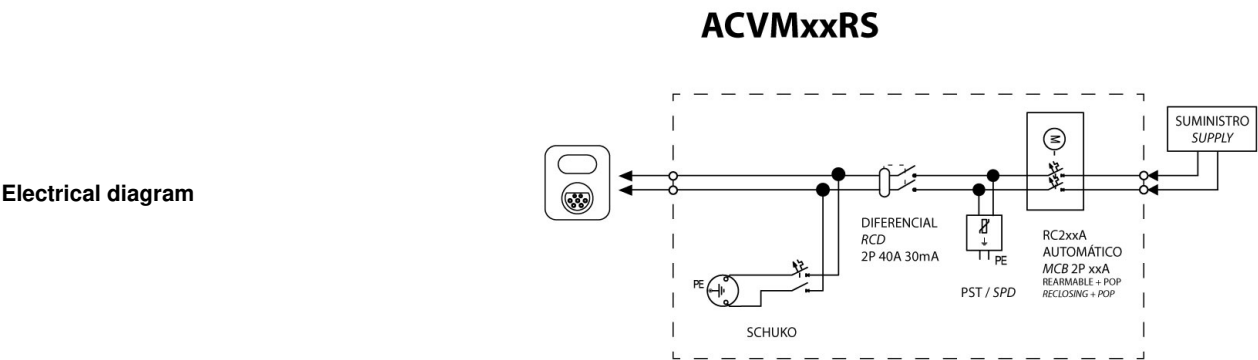


Dimensions

Product height	246 mm
Product width	310 mm
Product length	148 mm

Logistic data

Customs code	85371098
--------------	----------

Connection

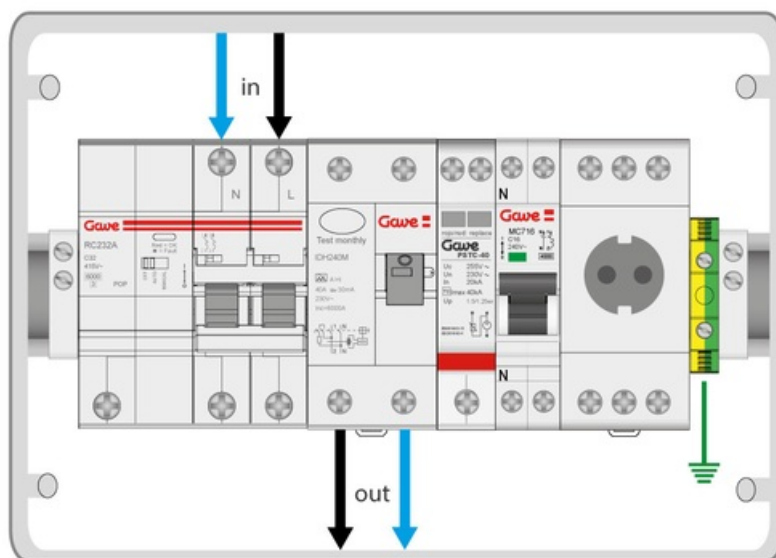

Dimensions

