

YL562A301

MOTORISED CHANGEOVER SWITCH 1-0-2 3P 160A INCOMING ON TOP. 80-230VAC



Code	007YL562A301
EAN	8430892216586
Product description	Motorised changeover switch 1-0-2, 3 poles 160A with motor unit supply 80- 230Vac. The supply incoming cables are connected on the top side of the unit and the load outgoing cables are connected on the bottom side. Size D3 dimensions 185x228x113, includes auxiliary contact 12A. Back plate mounting. Built-in internal links, mechanical and electrical interlock. Local emergency operation, includes removable padlockable handle. Display for switch position indication and operation counter.Impulse control logic. Protection against supply voltage failure. Terminal connection with tubular cable lugs M8 up to 120mm2.

Logistic data


Customs code	85365080
ETIM code	EC000216

Technical data

Poles	3
Rated voltage / frequency	690 V / 50 Hz
Operational rating (le)	160 A
Thermal rating (Ith)	160 A
Wire cross section	70 mm ²
Tightening torque	6 Nm
Connection screws	M8
Terminal	
Peak consumption	2.5 A

Peak consumption	2,5 A
Nominal consumption	40 mA
Weight	2850 gr
Supply voltage (V DC)	12 V +15%
Standard	IEC 60947-3
Ү5 Туре	56
Supply	80-230V AC

Connection

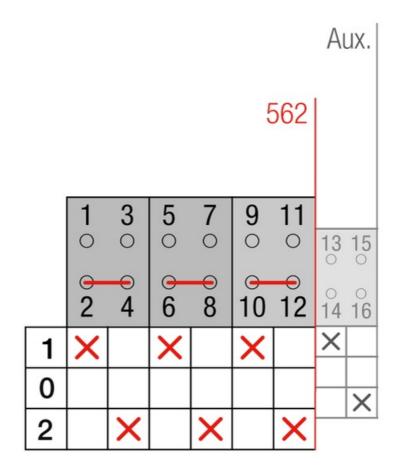

Dimensions

