

ACT50EDA

AC MODULAR COMBINER BOX THREE PHASE MCB 50A RCCB TYPE A 30mA



Code	029ACT50EDA
EAN	8430892313810

Product description

Modular combiner box with mcb, rccb and overvoltage protection and equipped with modular circuit breaker 4 poles 50A C curve breaking capacity 10kA - EN 60898-1. Residual current circuit breaker four pole type A sensitivity 30mA for alternating current with pulsed direct current, protected against nuisance tripping 5kA, EN 61008-1. Overvoltage protection ClassII In 20kA I_{max} 40kA Up 1,5kV EN 61643-11 with associated fuse protection. Double insulation Class II box in polycarbonate material for indoor and outdoor use with high impact resistance (IK08). Available space to add modular devices. Dimensions de 436x310x148mm.

Combiner box technical data

MCB - Circuit breaker	50 A
Curve	C
Breaking capacity EN 60898-1	6 kA
RCCB type	A - 30mA (EN 61008-1)
Inverter AC output	3P+N
Surge protector	Class II
Differential type	30mA
Surge protector code	PSTC440
Surge protector type	II
Nominal discharge current (In)	20 kA
Maximum discharge current (Imax)	40 kA
Protection level at In (Up)	1.5 kV
Ingress protection IP	IP65 - IEC 60529
Impact protection IK	IK08 - IEC 62262
Standards	IEC EN 6143-1/2


Dimensions

Product height	436 mm
Product width	310 mm
Product length	148 mm

Logistic data

Customs code	85371098
--------------	----------

Connection

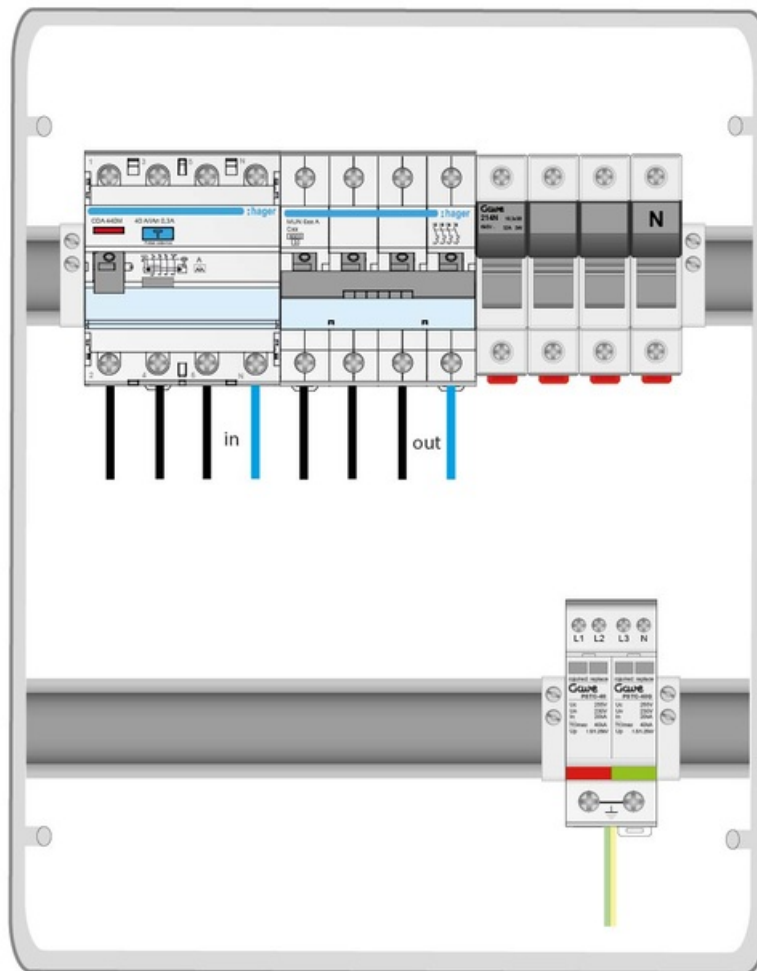

Dimensions

